



D&D MOTOR SYSTEMS INC.
SYRACUSE, N.Y.
Model # 170-022-0002

Mfg. Date	Serial #	Rating
XXXXXX	XXXX	CLASS

MADE IN U.S.A.

MOTOR WIRING CONNE
CW ROTATION DRIVE EN
CONNECT S2 & A1 TOGETHER
CONNECT S1 TO BATTERY TER
CONNECT A2 TO OTHER BATTERY
CCW ROTATION DRIVE EN
SWITCH S1 & S2 CONNECT


A2	D&D MOTOR SYSTEMS INC.	A1
S2	SYRACUSE N.Y.	S1
Model # 170-022-0002		
Mfg. Date	Serial #	Rating
XXXX/XX	XXXX	CLASS H
		Voltage
		XX
MADE IN U.S.A.		

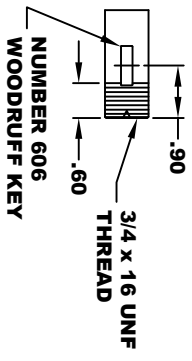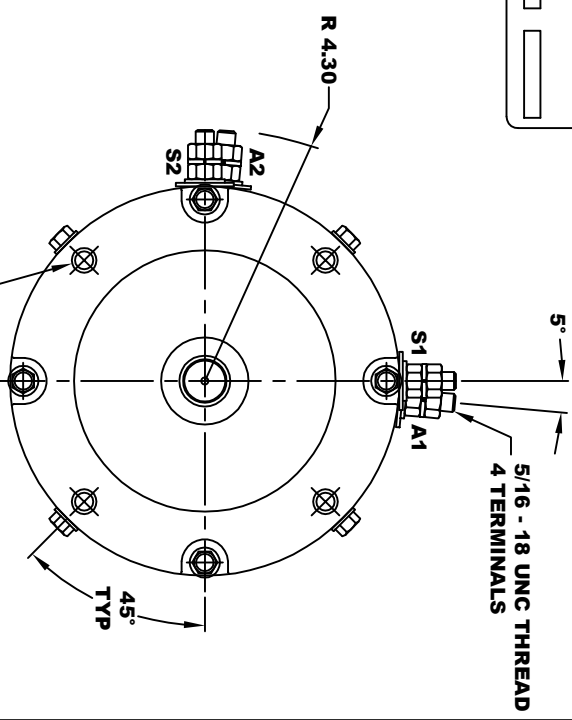

MOTOR WEIGHT: 51 LBS
CLASS "H" INSULATION
PERFORMANCE SPEC: 96 / K-254

3/8 - 16 UNC THREAD
∇ .65 MINIMUM
.03-.05 x 45° CHAMFER
4 PLACES, ON A Ø5.875 B. C.

TORQUE SPECIFICATION FOR POWER CABLE SECURING TOP NUTS
5/16-18 UNC - 110 IN / LBS MAX

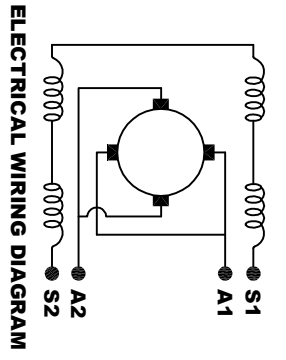

MOTOR WIRING CONNECTIONS:
CW ROTATION DRIVE END
CONNECT S2 & A1 TOGETHER
CONNECT S1 TO BATTERY TERMINAL
CCW ROTATION DRIVE END
CONNECT A2 TO OTHER BATTERY TERMINAL
SWITCH S1 & S2 CONNECTIONS

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.
DO NOT SCALE
WORK TO DIMENSIONS
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS

XX .01
XX .005
XX RUGH CASTING .03
HOLES .001 / +.006
ANGLES .030"

D & D MOTOR SYSTEMS INC			
MOTOR OUTLINE			
SIZE	DRAWN DATE	RELEASE DATE	DRG NO. / PART NO.
B	8-30-24	8-30-24	170-022-0002
SCALE	STF	DRAWN BY	MUG
			REV