

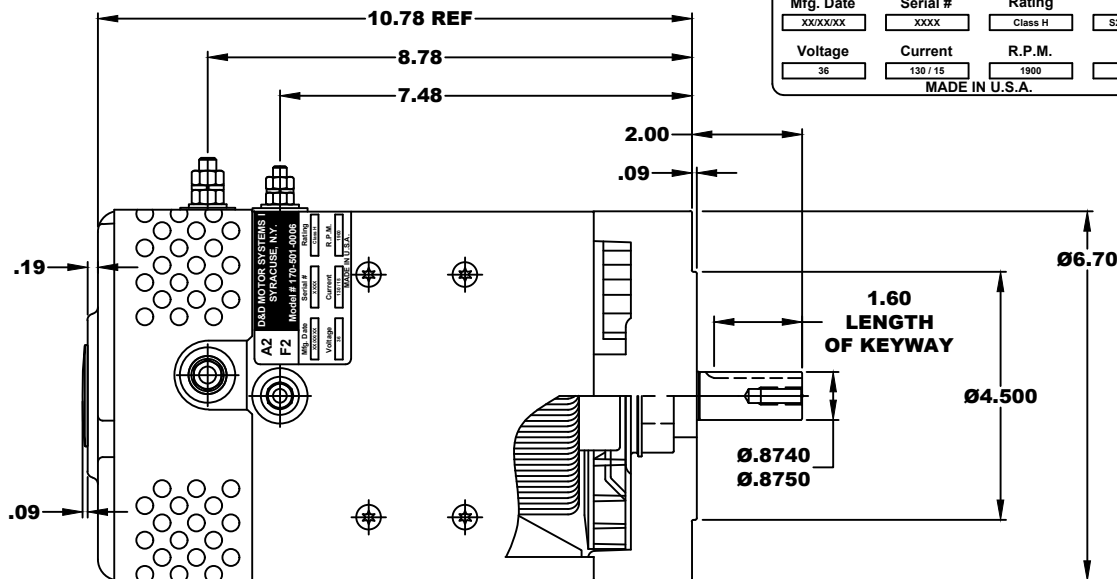
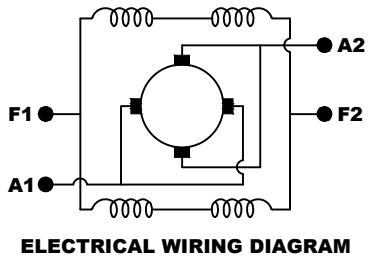


A2	D&D MOTOR SYSTEMS INC.		A1
F2	SYRACUSE N.Y.		F1
Model # 170-501-0006			
Mfg. Date	Serial #	Rating	Duty
XXXXXXX	XXXX	Class H	S2 - 60 MIN
Voltage	Current	R.P.M.	H.P.
36	130 / 15	1900	5.0
MADE IN U.S.A.			

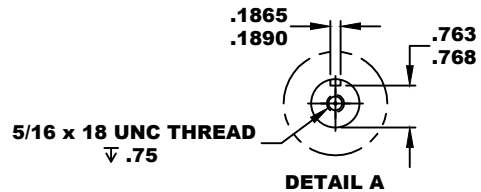

**TORQUE SPECIFICATION FOR
POWER CABLE SECURING TOP NUTS**
5/16-18 UNC (A1 / A2) - 110 IN / LBS MAX
1/4-20 UNC (F1 / F2) - 50 IN / LBS MAX

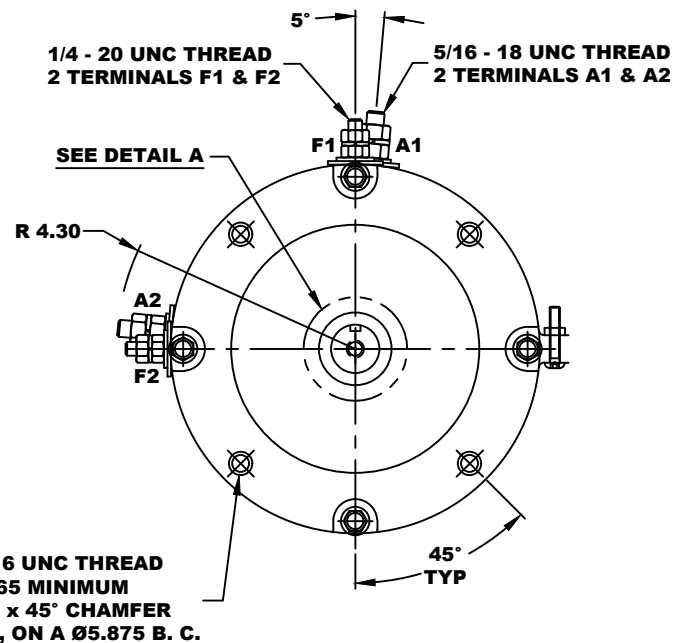

MOTOR WIRING CONNECTIONS:
CW ROTATION DRIVE END
CONNECT A1 & F1 TO ONE BATTERY TERMINAL
CONNECT A2 & F2 TO OTHER BATTERY TERMINAL
CCW ROTATION DRIVE END
SWITCH F1 & F2 CONNECTIONS

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.	
DO NOT SCALE	
WORK TO DIMENSIONS	
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS	
.XX	.01
.XXX	.005
.XX ROUGH CASTING	.03
HOLES	-.001 / +.006
ANGLES	0°30"

D & D MOTOR SYSTEMS INC				
MOTOR OUTLINE				
SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.	REV
B	3-12-02	8-9-24	170-501-0006	
SCALE	STF	DRAWN BY	MJG	REV DATE
			ES-10A	

MOTOR WEIGHT: 50 LBS
CLASS "H" INSULATION
PERFORMANCE SPEC: 5