




<b>A2</b>	<b>D&amp;D MOTOR SYSTEMS INC.</b>			<b>A1</b>
<b>S2</b>	<b>SYRACUSE, N.Y.</b>			<b>S1</b>
<b>Model # ES-10D</b>				
Mfg. Date	Serial #	Rating	Duty	
XXXXXX	XXXX	Class H	S2 - 60 MIN	
Voltage	Current	R.P.M.	H.P.	
48	135	2570	6.8	
MADE IN U.S.A.				

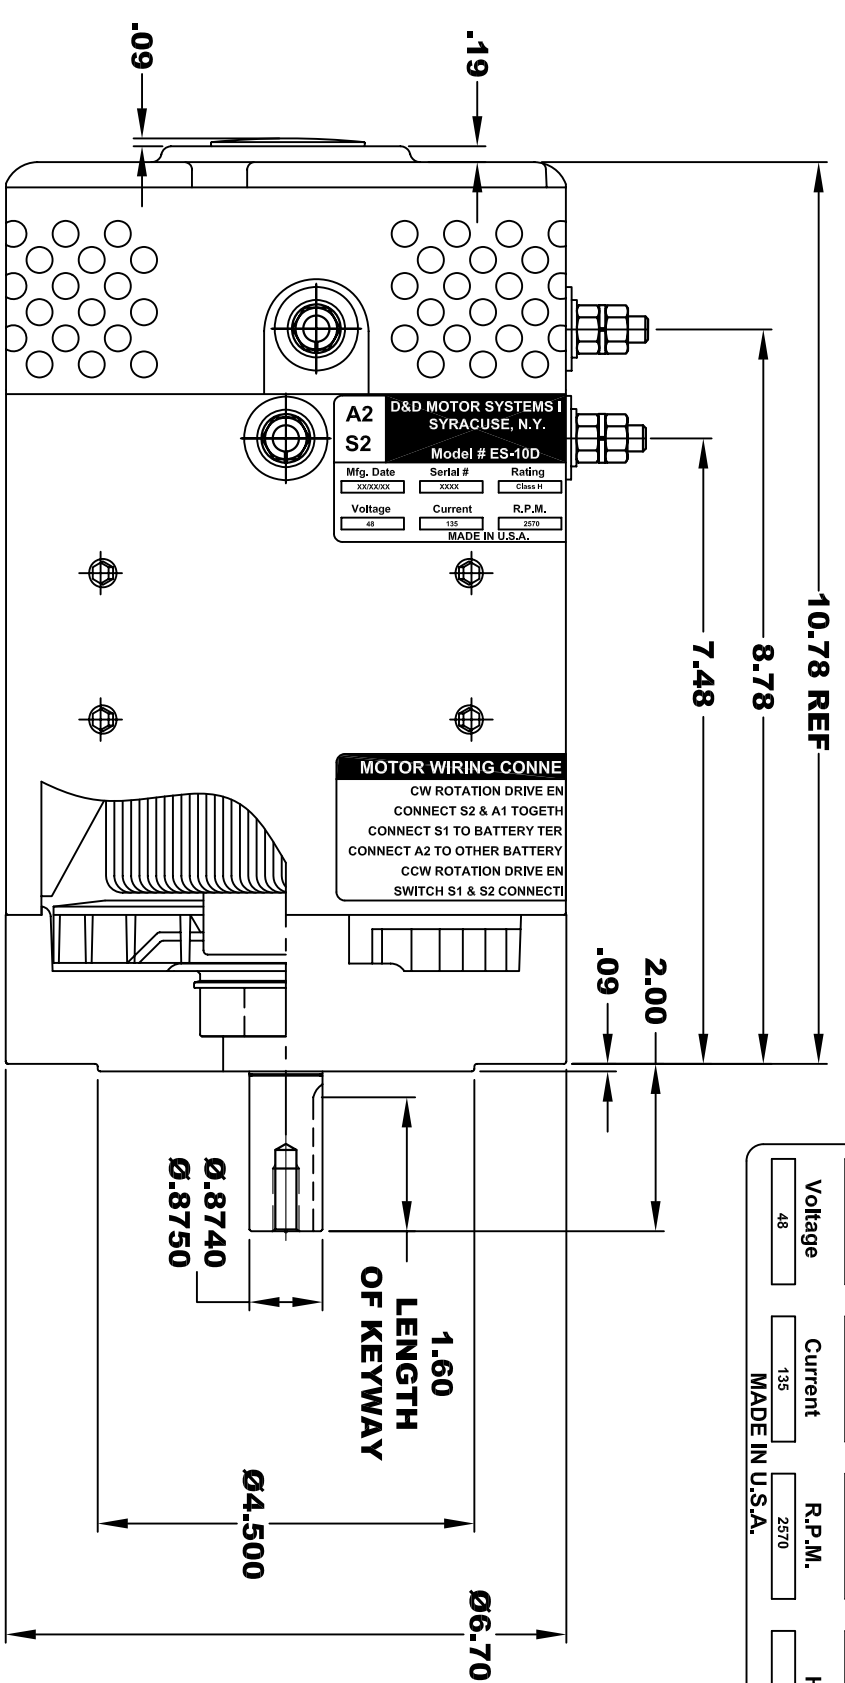

**3/8 - 16 UNC THREAD**  
 ↓ .65 MINIMUM  
 .03 -.05 x 45° CHAMFER  
 4 PLACES, ON A Ø5.875 B. C.

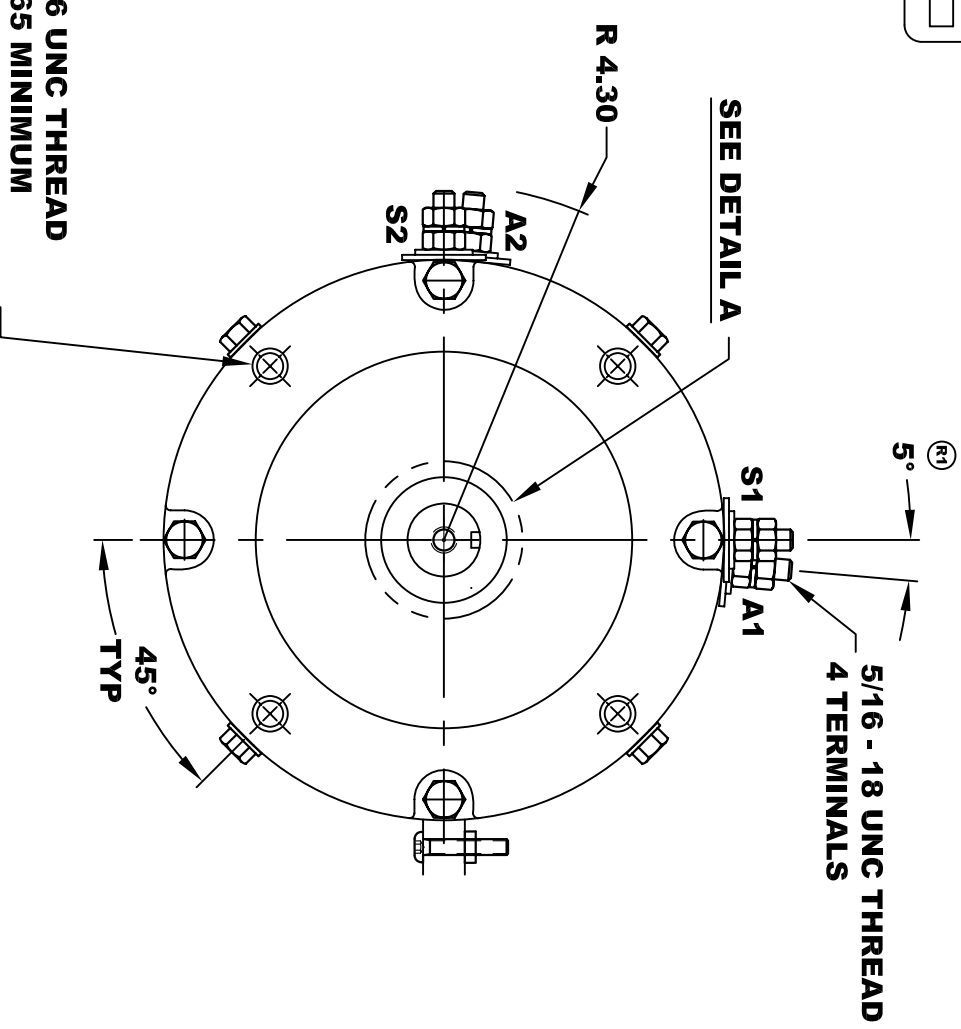

**TORQUE SPECIFICATION FOR  
 POWER CABLE SECURING TOP NUTS**  
 5/16-18 UNC - 110 IN / LBS MAX

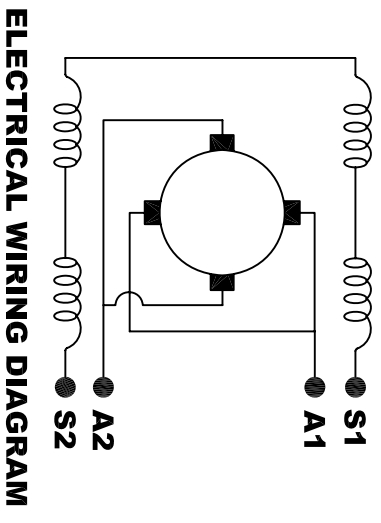

**MOTOR WIRING CONNECTIONS:**  
 CW ROTATION DRIVE END  
 CONNECT S2 & A1 TOGETHER  
 CONNECT S1 TO BATTERY TERMINAL  
 CCW ROTATION DRIVE END  
 CONNECT A2 TO OTHER BATTERY TERMINAL  
 SWITCH S1 & S2 CONNECTIONS

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.  
 DO NOT SCALE  
 WORK TO DIMENSIONS  
 TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS  
 .XX \_\_\_\_\_ .01  
 .XXX \_\_\_\_\_ .005  
 .XX ROUGH CASTING \_\_\_\_\_ .03  
 HOLES \_\_\_\_\_ -.001 / +.006  
 ANGLES \_\_\_\_\_ 0°30"

<b>D &amp; D MOTOR SYSTEMS INC</b>			
<b>MOTOR OUTLINE</b>			
SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.
B	6-28-02		ES-10D
SCALE	STF	DRAWN BY	MJG
			REV DATE
			R1 11-19-03

**MOTOR WEIGHT: 51 LBS**  
**CLASS "H" INSULATION**  
**PERFORMANCE SPEC: 1**