



A2	D&D MOTOR SYSTEMS INC.	A1
S2	SYRACUSE N.Y.	S1
Model # ES-115-58		
Mfg. Date	Serial #	Rating
XXXXXX	XXXX	CLASS H
Voltage		36 / 48
MADE IN U.S.A.		

**TORQUE SPECIFICATION FOR
POWER CABLE SECURING TOP NUTS
5/16-18 UNC - 110 IN / LBS MAX**

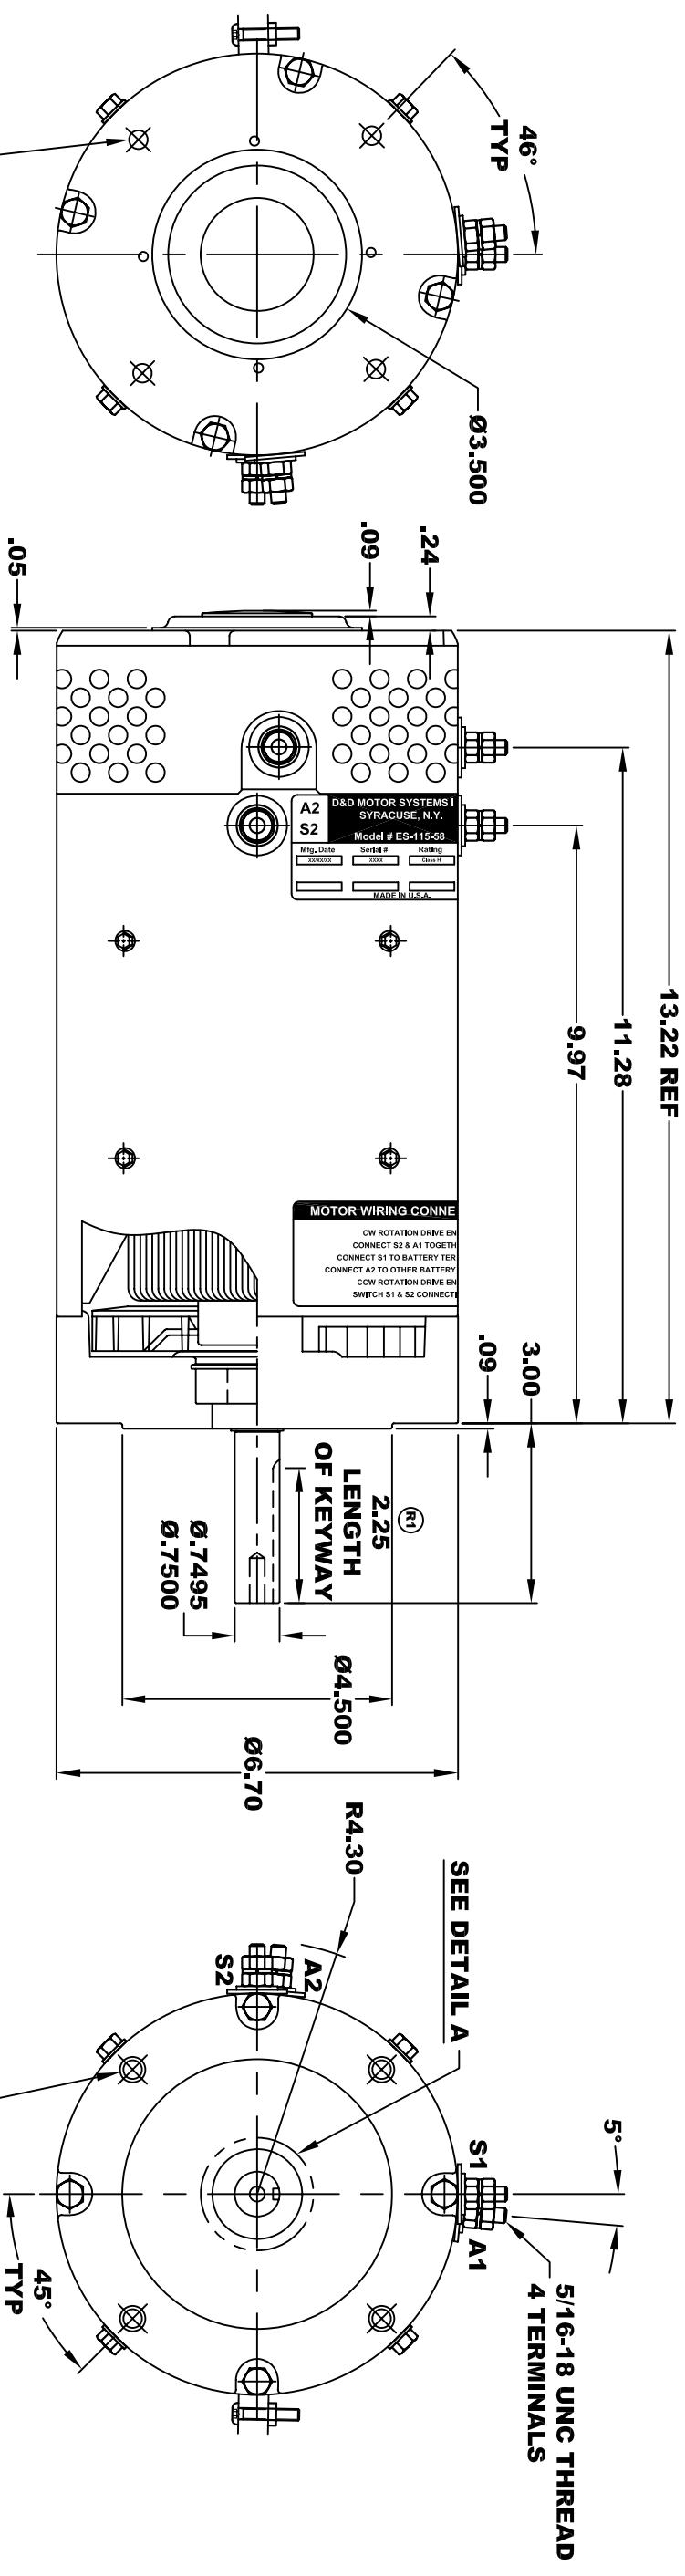

**5 / 16 - 18 UNC THREAD
4 HOLES TAPPED THRU
EQUALLY SPACED
ON A 5.51 B.C.**

**MOTOR WEIGHT: XX LBS
CLASS "H" INSULATION
PERFORMANCE SPEC: 58**

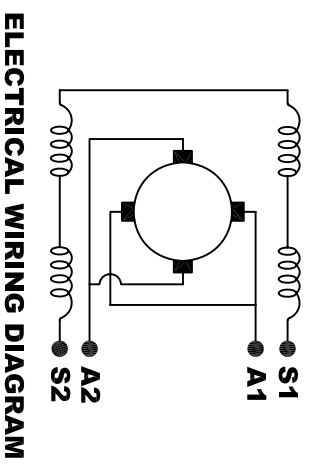

**MOTOR WIRING CONNECTIONS:
CW ROTATION DRIVE END
CONNECT S2 & A1 TOGETHER
CONNECT S1 TO BATTERY TERMINAL
CCW ROTATION DRIVE END
CONNECT A2 TO OTHER BATTERY TERMINAL
SWITCH S1 & S2 CONNECTIONS**

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.
DO NOT SCALE
WORK TO DIMENSIONS
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS

.XX	.01
.XXX	.005
.XX ROUGH CASTING	.03
HOLES	-.001 / +.006
ANGLES	0°30"

D & D MOTOR SYSTEMS INC			
MOTOR OUTLINE			
SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.
B	4-8-05		ES-115-58
SCALE	DRAWN BY	REV DATE	REV
STF	MJG	4-12-06	R1