
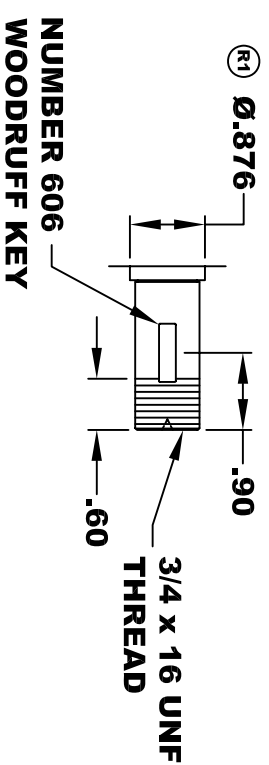


<b>D&amp;D MOTOR SYSTEMS INC.</b>			
<b>SYRACUSE N.Y.</b>			
<b>A2</b>	<b>S2</b>	<b>Model # ES-15G-26</b>	<b>A1</b>
Mfg. Date	Serial #	Rating	Voltage
XXXX/XX	XXXX	CLASS H	XX
MADE IN U.S.A.			

**TORQUE SPECIFICATION FOR  
POWER CABLE SECURING TOP NUTS  
5/16-18 UNC - 110 IN / LBS MAX**

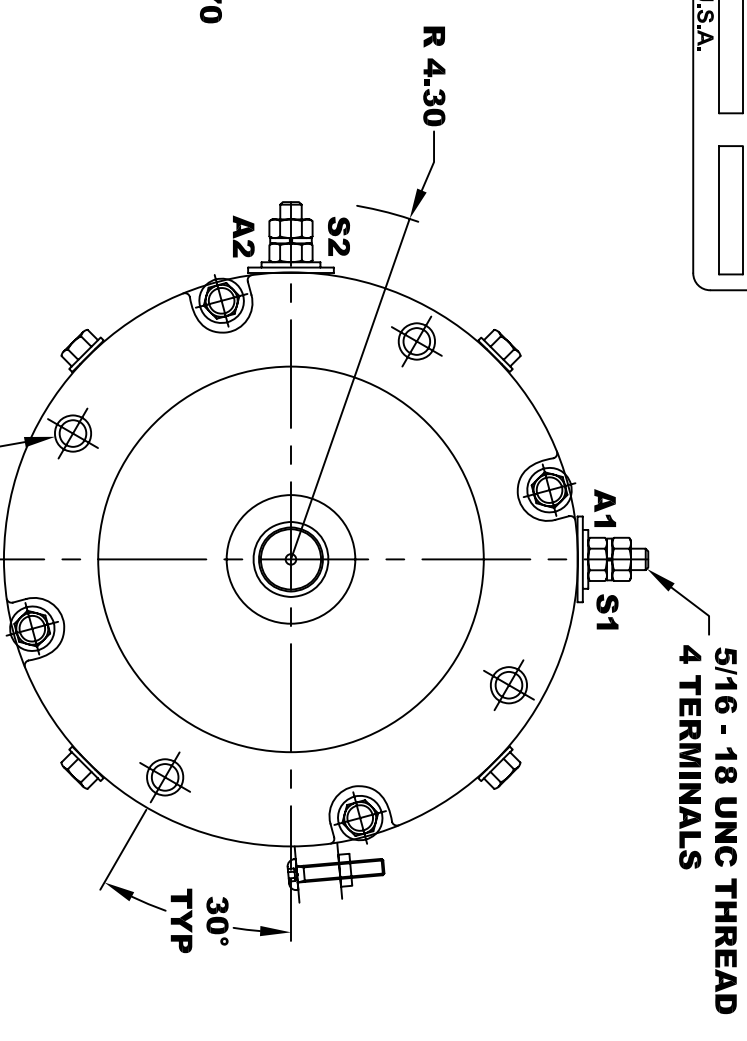


**MOTOR WEIGHT: 63 LBS  
CLASS "H" INSULATION  
PERFORMANCE SPEC: 26**

**D & D MOTOR SYSTEMS INC**

**MOTOR OUTLINE**

SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.	REV
B	2-1-07		ES-15G-26	R1
SCALE	STF	DRAWN BY	MJG	REV DATE
				6-5-13

- MOTOR WIRING CONNECTIONS:**
- CW ROTATION DRIVE END**
  - CONNECT S2 & A1 TOGETHER**
  - CONNECT S1 TO BATTERY TERMINAL**
  - CCW ROTATION DRIVE END**
  - CONNECT A2 TO OTHER BATTERY TERMINAL**
  - SWITCH S1 & S2 CONNECTIONS**

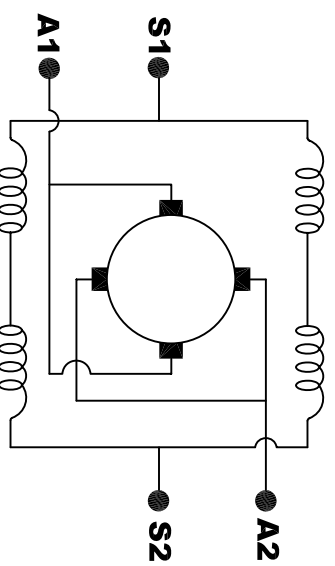

**ELECTRICAL WIRING DIAGRAM**

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.  
DO NOT SCALE  
WORK TO DIMENSIONS  
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS

.XXX .005  
.XX .01  
.XX ROUGH CASTING .03  
HOLES -.001 / +.006  
ANGLES 0°30"