

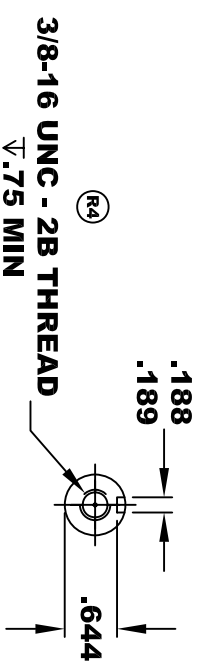


<b>D&amp;D MOTOR SYSTEMS INC.</b>			
<b>SYRACUSE N.Y.</b>			
<b>Model # ES-26</b>			
Mfg. Date	Serial #	Rating	Duty
XX/XX/XX	XXXX	Class H	S2 - 60 MIN
Voltage	Current	R.P.M.	H.P.
48	130	3050	6.4
<b>MADE IN U.S.A.</b>			

**TORQUE SPECIFICATION FOR  
POWER CABLE SECURING TOP NUTS**  
3/8 - 16 UNC - 140 IN / LBS MAX

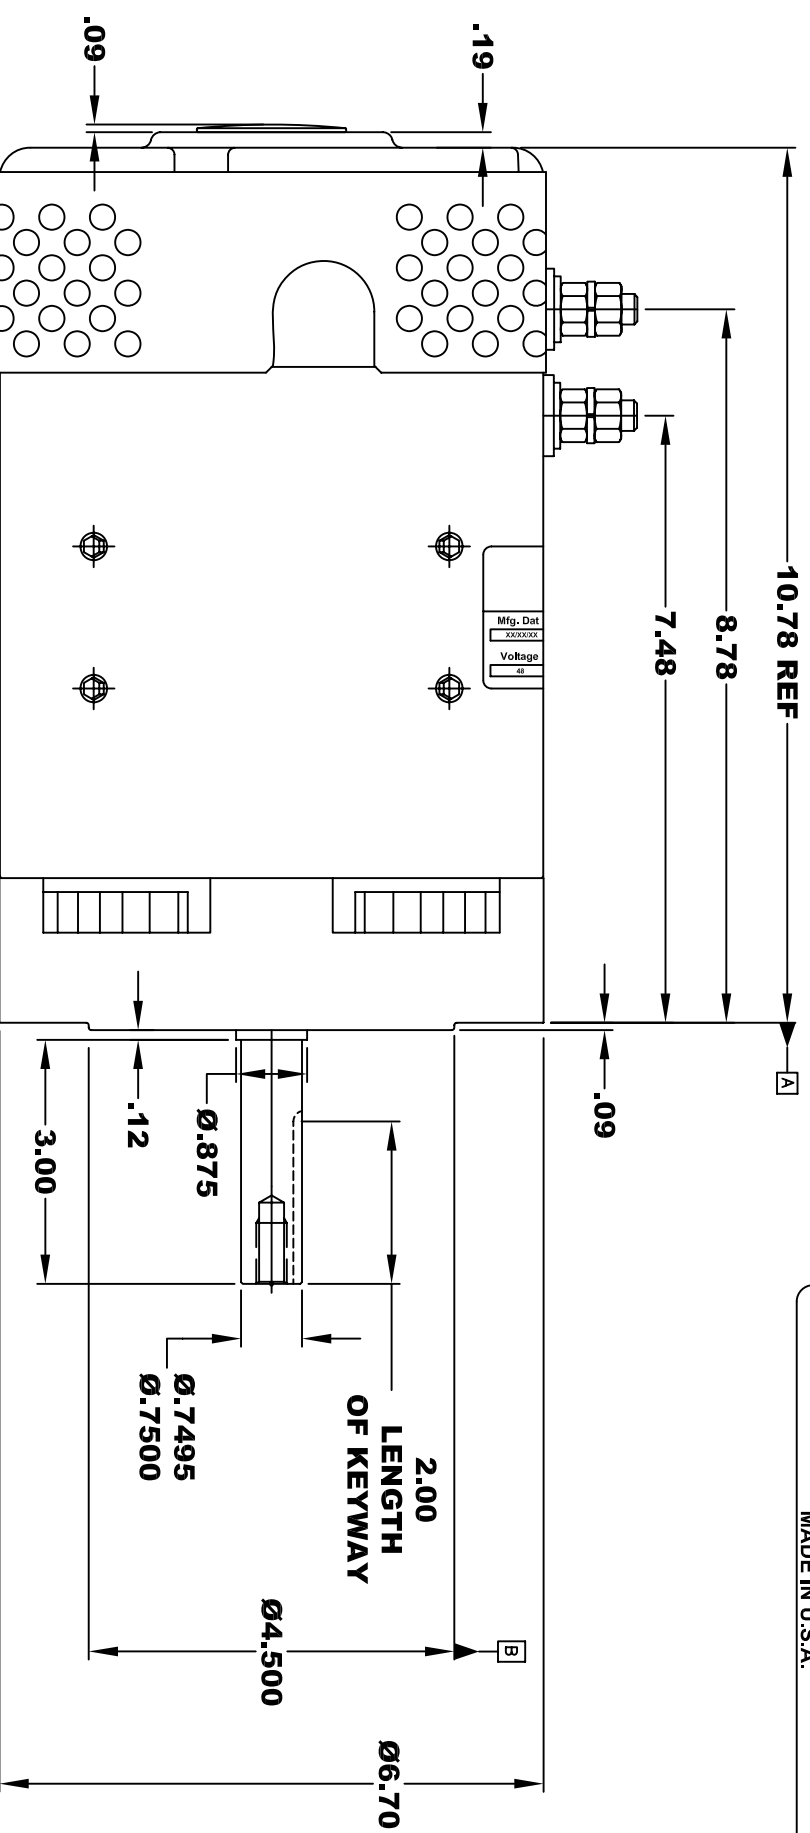

**SEE DETAIL A**  
3/8 - 16 UNC THREAD  
↓ .65 MINIMUM  
.03 -.05 x 45° CHAMFER  
4 PLACES, ON A Ø5.875 B. C.

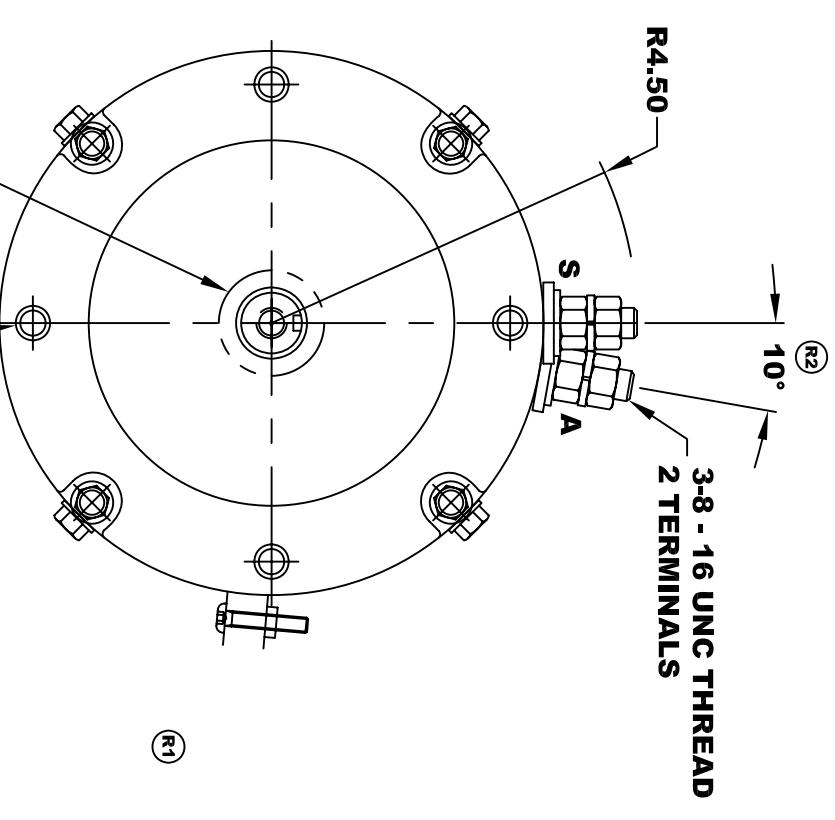

**MOTOR WEIGHT: 50 LBS**  
**CLASS "H" INSULATION**  
**PERFORMANCE SPEC: 40**


**REVISE DIMENSIONS**

**D & D MOTOR SYSTEMS INC**

**MOTOR OUTLINE**

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.  
DO NOT SCALE  
WORK TO DIMENSIONS  
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS  
.XX \_\_\_\_\_ .01  
.XXX \_\_\_\_\_ .005  
.XX ROUGH CASTING \_\_\_\_\_ .03  
HOLES \_\_\_\_\_ -.001 / +.006  
ANGLES \_\_\_\_\_ 0°30"

SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.	REV
B	7-8-02		ES-26	R4
SCALE	STF	DRAWN BY	MJG	REV DATE
				7-17-14

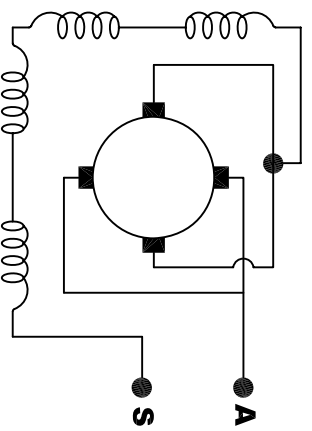

**ELECTRICAL WIRING DIAGRAM**

**MOTOR WIRING CONNECTIONS:**

**CCW ROTATION DRIVE END**  
**CONNECT ONE POWER CABLE TO TERMINAL A**  
**CONNECT THE OTHER POWER CABLE TO TERMINAL S**