

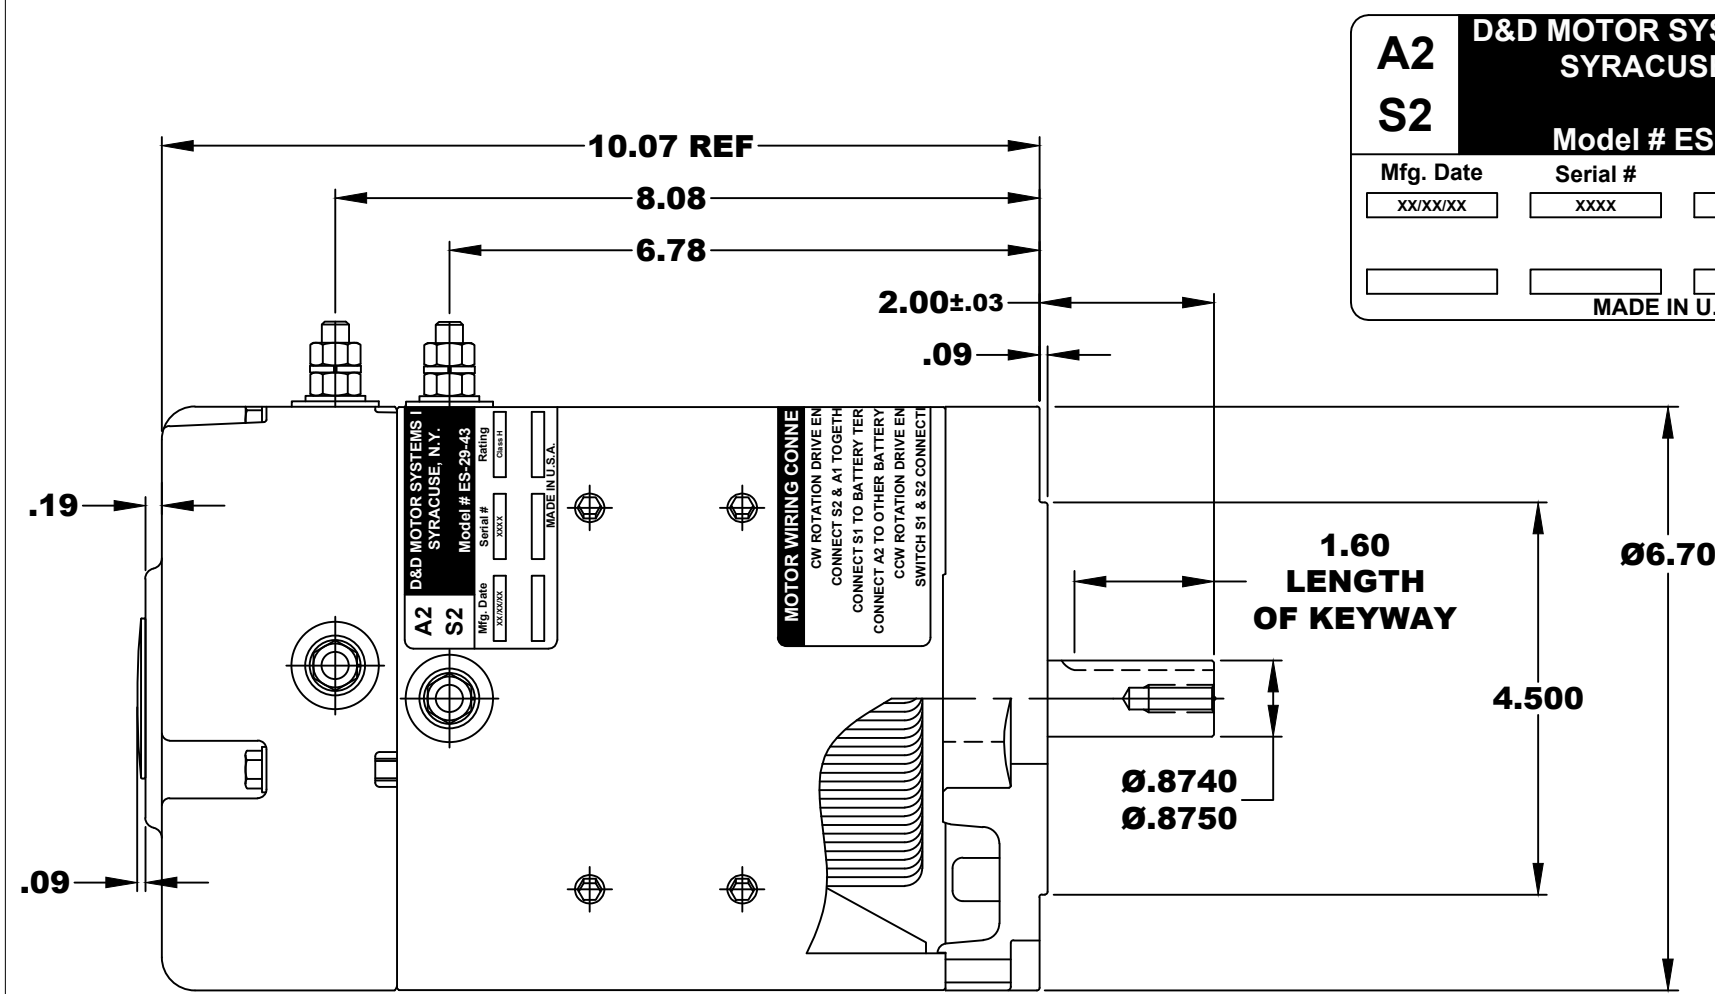
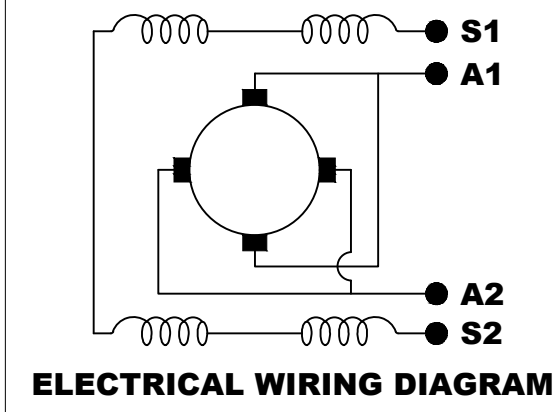


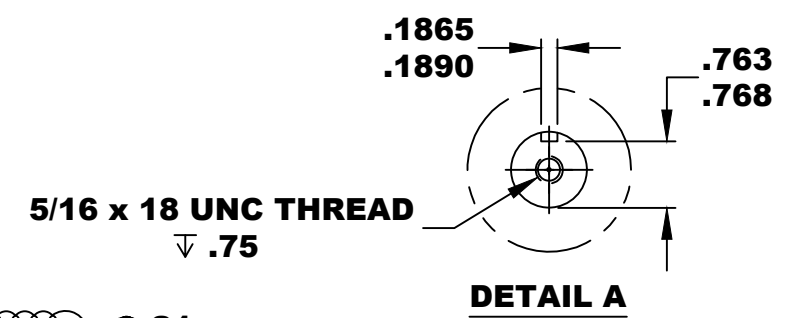

A2	D&D MOTOR SYSTEMS INC. SYRACUSE N.Y.		A1
S2	Model # ES-29-43		S1
Mfg. Date	Serial #	Rating	Voltage
XX/XX/XX	XXXX	CLASS H	XX
MADE IN U.S.A.			

**TORQUE SPECIFICATION FOR
POWER CABLE SECURING TOP NUTS
5/16-18 UNC - 110 IN / LBS MAX**

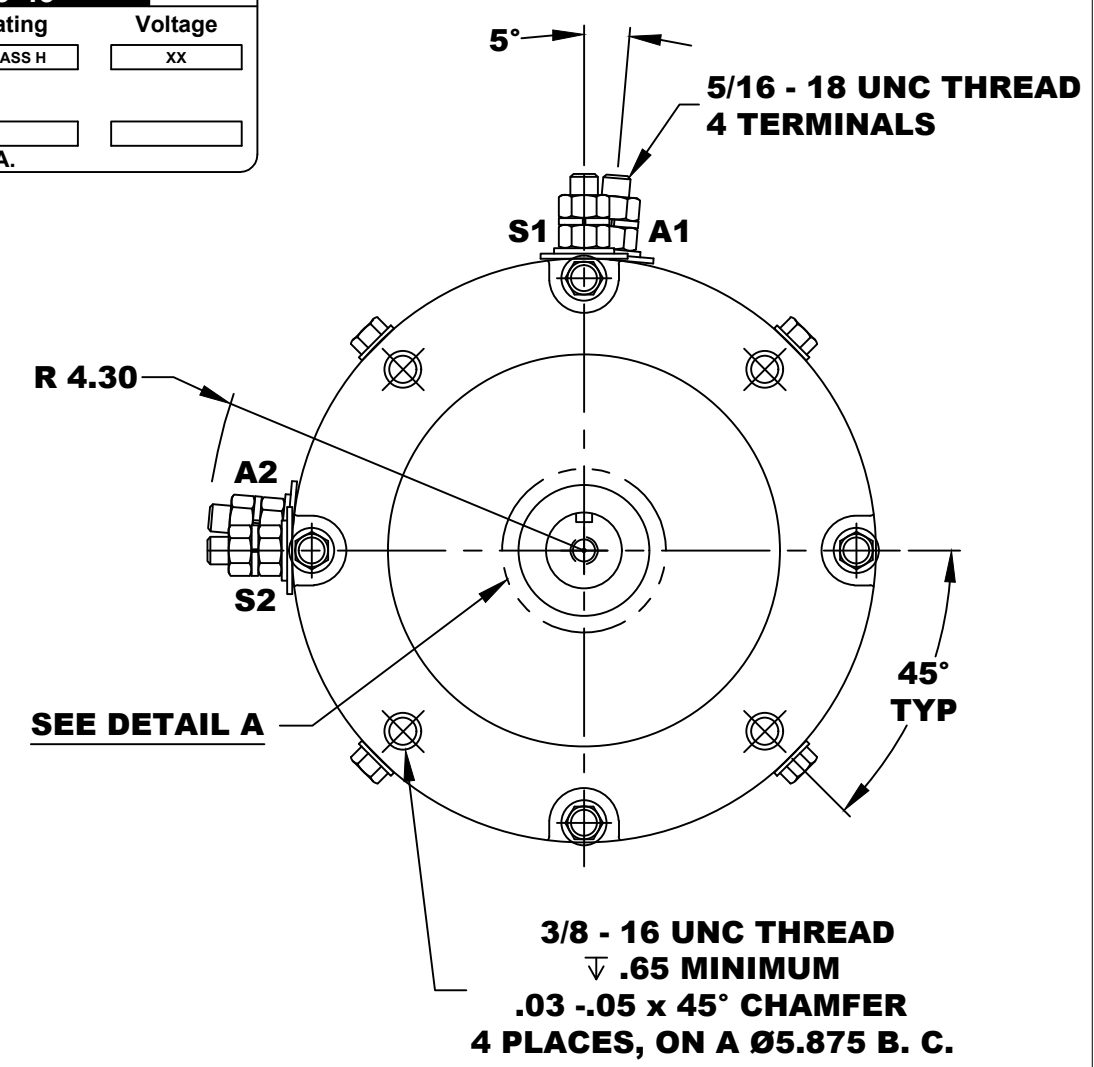

MOTOR WIRING CONNECTIONS:
CW ROTATION DRIVE END
CONNECT S2 & A1 TOGETHER
CONNECT S1 TO BATTERY TERMINAL
CCW ROTATION DRIVE END
SWITCH S1 & S2 CONNECTIONS

MOTOR WEIGHT: 51 LBS
CLASS "H" INSULATION
PERFORMANCE SPEC: 43 / K-254

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.				
DO NOT SCALE				
WORK TO DIMENSIONS				
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS				
.XX _____ .01				
.XXX _____ .005				
.XX ROUGH CASTING _____ .03				
HOLES _____ -.001 / +.006				
ANGLES _____ 0°30"				
D & D MOTOR SYSTEMS INC				
MOTOR OUTLINE				
SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.	REV
B	5-18-05		ES-29-43	
SCALE	STF	DRAWN BY	MJG	REV DATE