

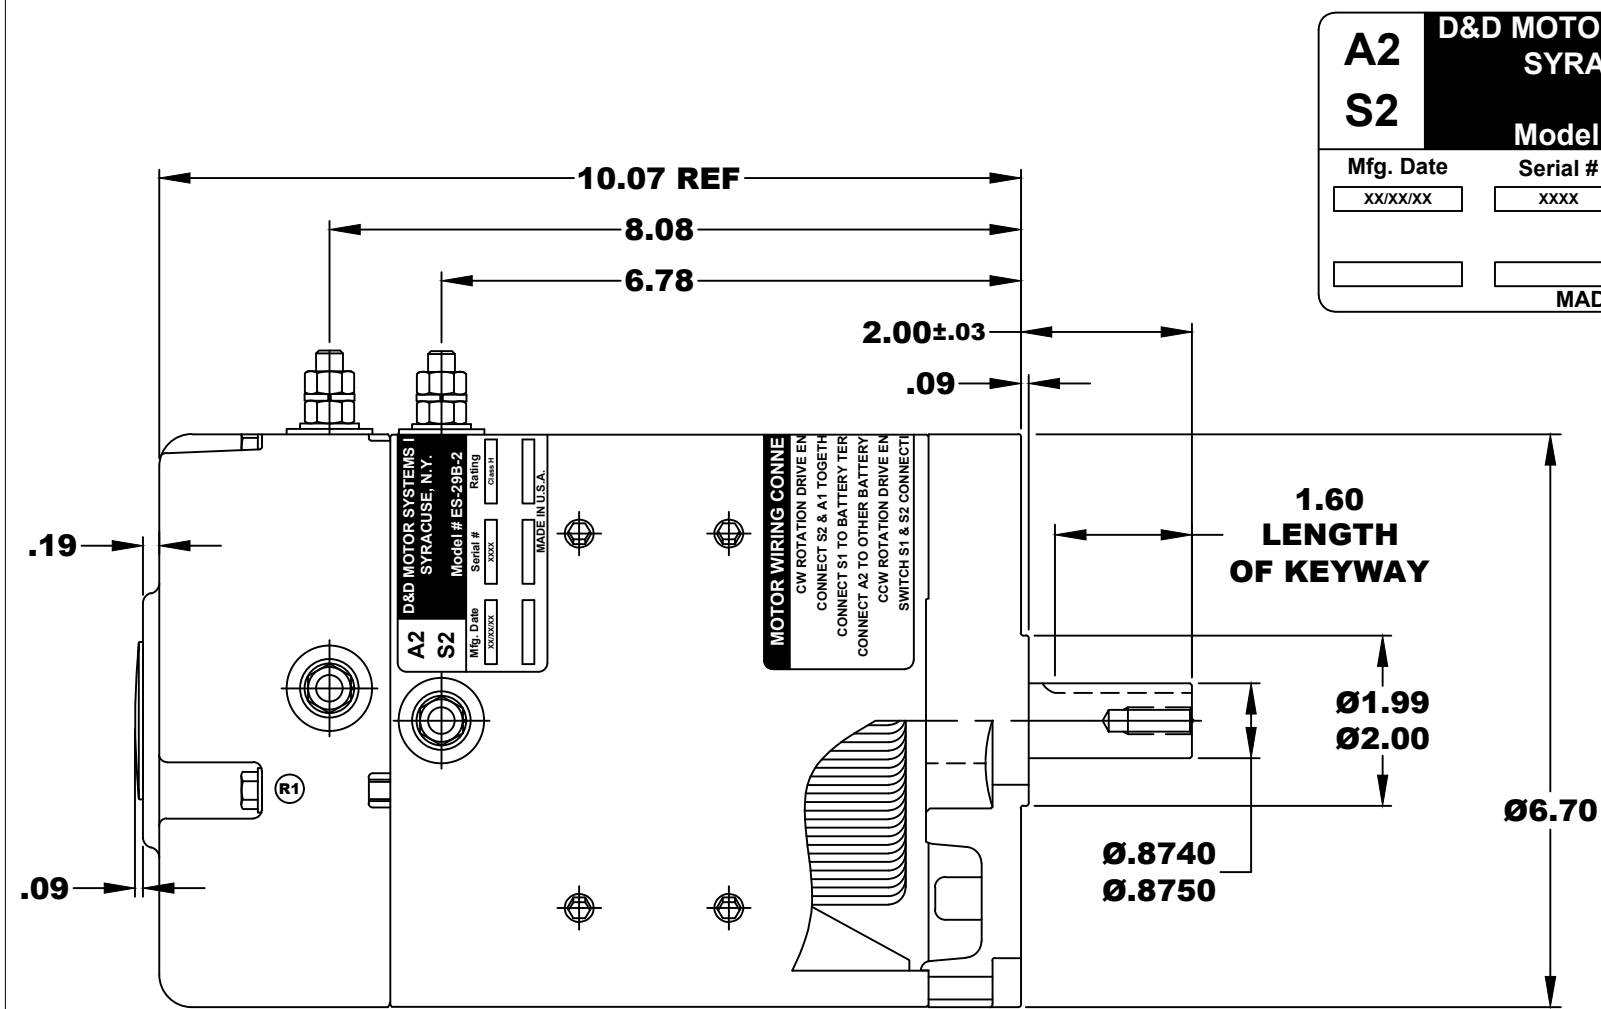
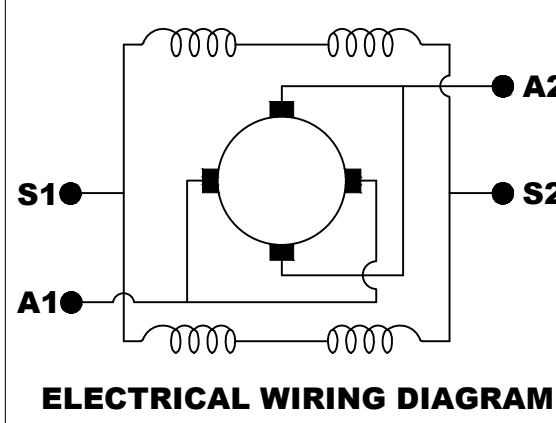


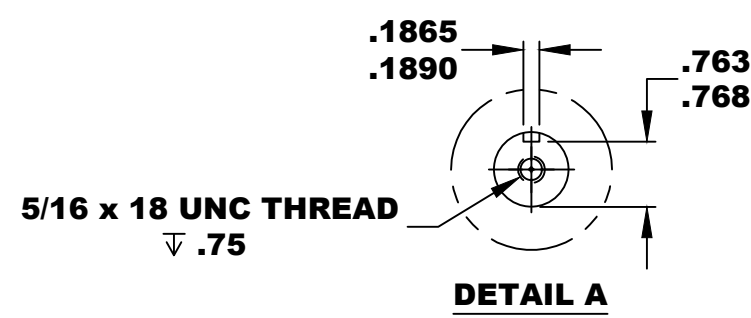

A2 S2	D&D MOTOR SYSTEMS INC. SYRACUSE N.Y.		A1 S1
	Model # ES-29B-2		
Mfg. Date	Serial #	Rating	Voltage
XX/XX/XX	XXXX	Class H	36 / 48
MADE IN U.S.A.			

**TORQUE SPECIFICATION FOR
POWER CABLE SECURING TOP NUTS**
5/16-18 UNC - 110 IN / LBS MAX

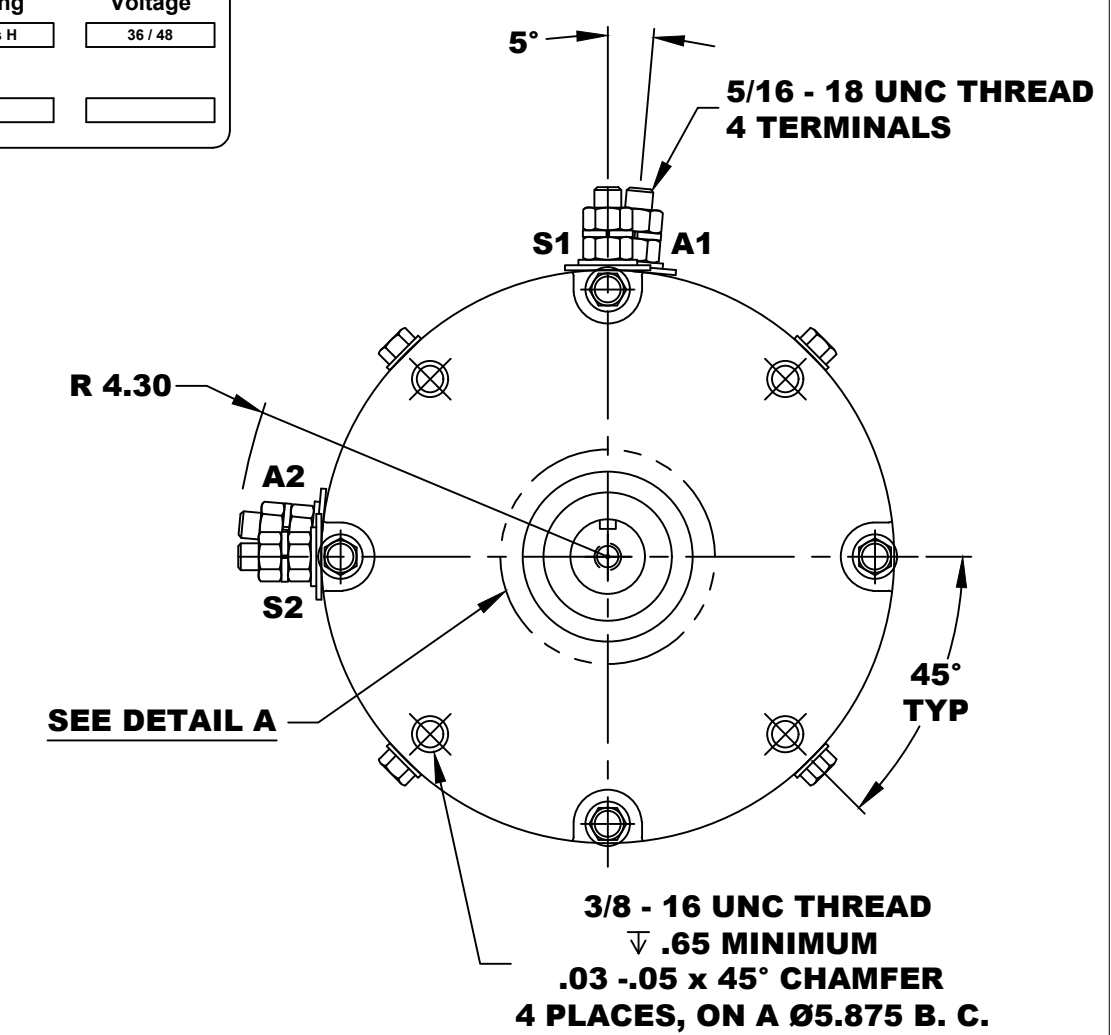

MOTOR WIRING CONNECTIONS:
CW ROTATION DRIVE END
CONNECT S2 & A1 TOGETHER
CONNECT S1 TO BATTERY TERMINAL
CCW ROTATION DRIVE END
SWITCH S1 & S2 CONNECTIONS

MOTOR WEIGHT: 51 LBS
CLASS "H" INSULATION
PERFORMANCE SPEC: 2 / K-254

THIS PRINT IS THE PROPERTY OF D&D MOTOR SYSTEMS INC.				
DO NOT SCALE				
WORK TO DIMENSIONS				
TOLERANCES UNLESS OTHERWISE SPECIFIED ARE AS FOLLOWS				
.XX	.01			
.XXX	.005			
.XX ROUGH CASTING	.03			
HOLES	-.001 / +.006			
ANGLES	0°30"			
D & D MOTOR SYSTEMS INC				
MOTOR OUTLINE				
SIZE	DRAWN DATE	RELEASE DATE	DWG NO. / PART NO.	REV
B	4-7-04		ES-29B-2	R1
SCALE	STF	DRAWN BY	MJG	REV DATE
				5-20-05